

36TH INTERNATIONAL CONFERENCE ON COASTAL ENGINEERING 2018

Baltimore, Maryland | July 30 – August 3, 2018

The State of the Art and Science of Coastal Engineering

Validation of Unstructured WaveWatch III for Nearshore Waves

Jane McKee Smith, PhD, PE, Tyler Hesser, PhD, Mary Anderson Bryant, PE

US Army Engineer Research and Development Center, Coastal and Hydraulics Laboratory

Aron Roland, PhD

BGS IT&E GmbH

Arun Chawla, PhD, Ali Abdolali, PhD, Henrique Alves, PhD, Andre van der Westhuysen, PhD

National Oceanic and Atmospheric Administration, National Centers for Environmental Protection





Motivation

Flexibility and high resolution for nearshore wave-driven processes:

- Nearshore circulation
- •Wave set up
- •Sediment transport

Accuracy and Efficiency






Unstructured WW3

Drivers:

- •Multi-scale coverage ~ 3 orders of magnitude
- •Implicit solution scheme and domain decomposition for efficient computations
 - explicit integration scheme limits Δt
 - 1m resolution ~ $\Delta t \approx 0.3 s$
- Collaboration between ERDC and NCEP

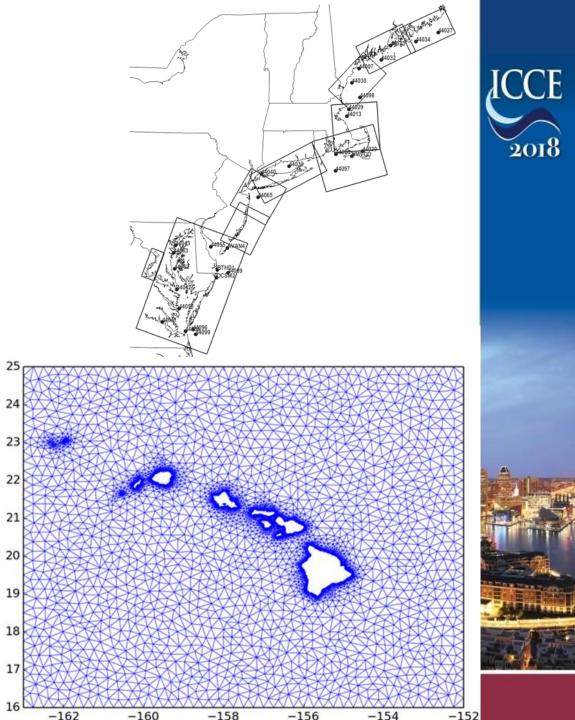


Parallel Computing in WW3

- WW3 was inherently designed to run parallel based on global arrays, but parallel propagation is limited by number of spectral bins
- Constraint relaxed by introducing a Multigrid option (Multigrid decomposition)
- Hybrid approach to parallelization involves spectral partitioning for advection in geographical space and domain decomposition for spectral advection and the source terms integration
- Replacement of global arrays with local arrays, optimize the model with respect to memory management, and implement parallel output within the domain decomposition framework





Domain Decomposition in ADCIRC/WW3 based on METIS/ParMETIS

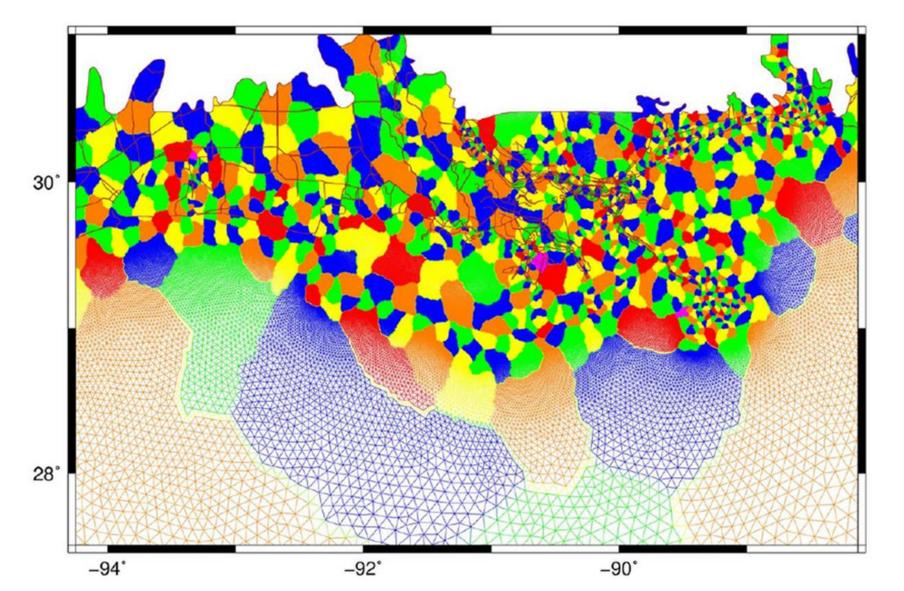



New Developments in Numerical Integration of the Wave Action Equation

2018

- Fully implicit integration of the advection part of the WAE
- New convergent action limiter ~ mix of Komen et al. + Hersbach and Janssen
- New integration of the action limiter, so only limits the source terms
- No numerical limiters on the wave breaking source term -- limit the wave height with the Miche criterion (Battjes & Janssen does not work on steep slopes)
- New Block-Jacobi and Block-Gauss-Seidel solvers with improved convergence criteria and efficient parallel implementation

Extension of WW3 Tools for Unstructured Grids

Software

- Implicit/explicit domain decomposition
- PDLIB ~ parallel decomposition

Calibration/Validation Suite

- Laboratory
- Analytical cases
- US East Coast and Gulf of Mexico
- US Great Lakes
- <u>USACE Field Research Facility, Duck, NC</u>
- Mediterranean





USACE Field Research Facility (FRF)


Outer Banks of North Carolina Cross-shore array of directional wave measurements:

•Buoys: 26 and 17 m depth

•AWACs: 11, 8 and 5

•AquaDopps: 4 and 3 m depth Winds/water levels ~ pier end Regular bathymetry surveys



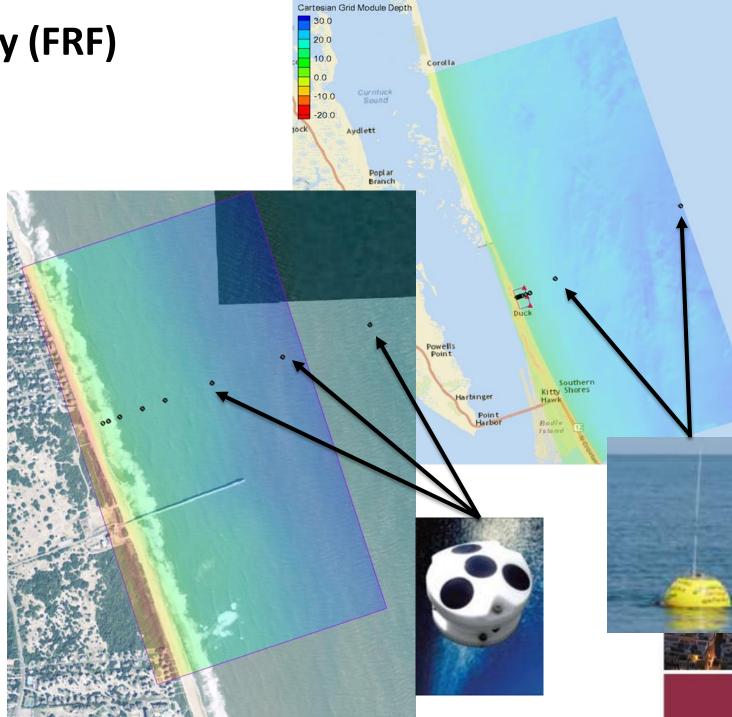


Storm Selection

Identified four storms:

- Hurricane Irene (Aug 2011)
- Nov 2011
- Hurricane Sandy (Oct 2012)

Criterion

- Two largest events (Irene & Sandy ~ 7+ m waves)
- Combined sea/swell event, 2.75 m waves (Nov 2011)
- Cross-shore array & offshore buoy operational
- Future: Slanting fetch, 5 m waves (Feb 2013), BathyDuck (2015, extratropical + H. Joaquin), full year simulation

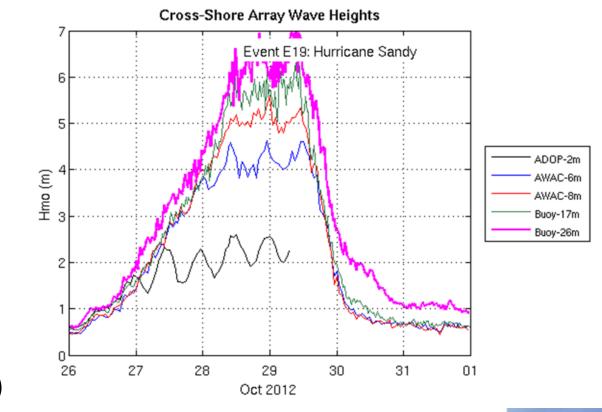




FRF Unstructured Grid

- 108,403 nodes, resolution 500–10 m •
- 20 km x 100 km, 26-m depth to ٠ shore

ST4 Source Terms ٠

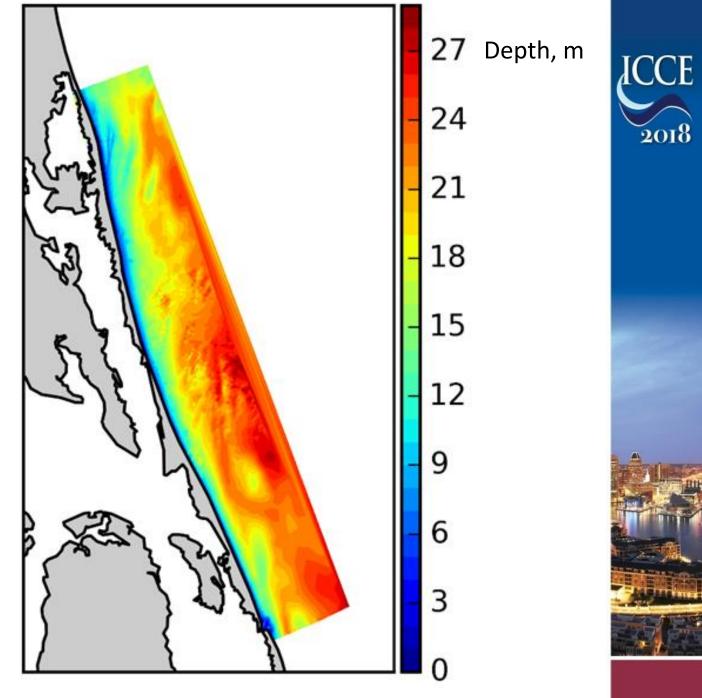


2018

Hurricane Sandy 2012

- 4th costliest hurricane in the U.S. (\$70 bill)
- Maximum wave heights of 7 m at the FRF
- Storm bypassed the FRF



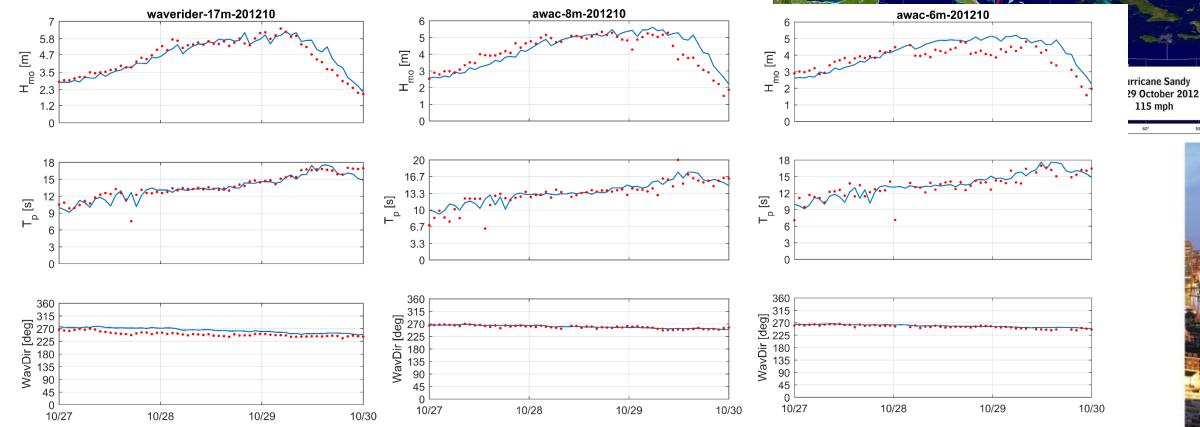

17 m depth


8 m depth

6 m depth


Hurricane Irene 2011

- 13th costliest hurricane in the U.S. (\$14 bill)
- Maximum wave heights of 8 m at the FRF
- Landfall in North Carolina as Cat 1
- Storm passed inland of the FRF



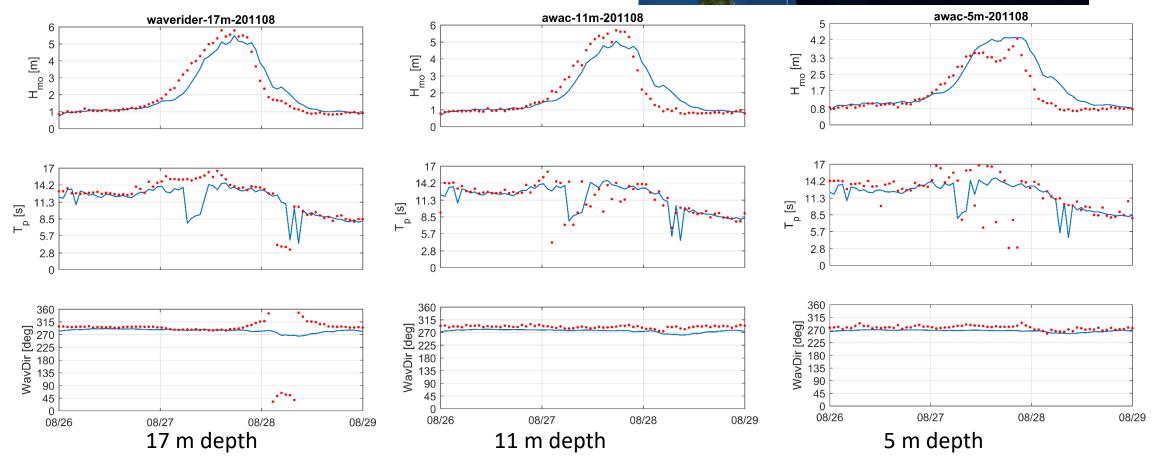

Hurricane Irene 2011 – Normalized Source Term Balance

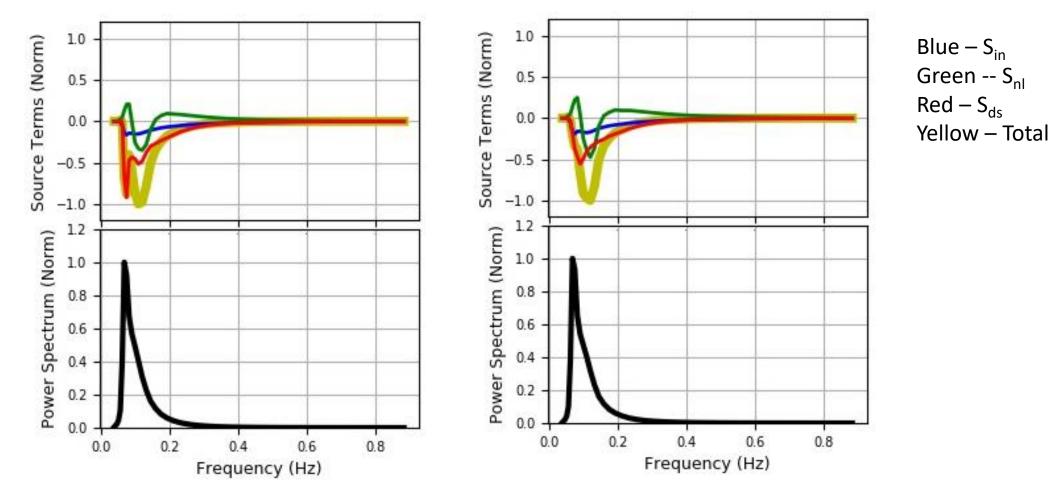

Smoothed Saturation Spectrum






Extratropical Nov 8-12 2011

- Maximum wave heights of 2.8 m at the FRF
- Mixed sea/swell event



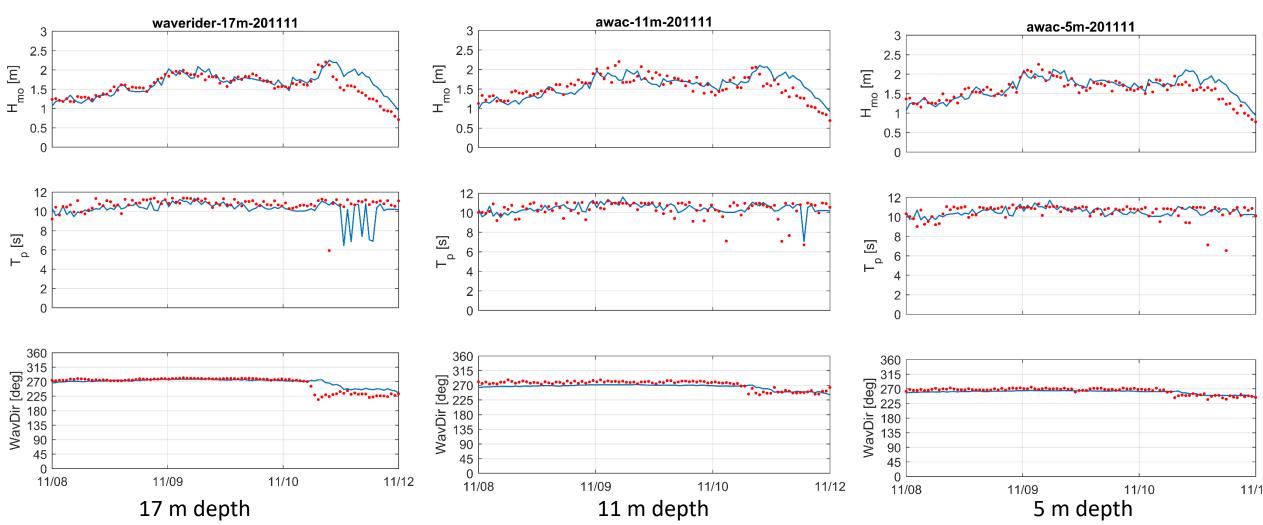

Errors

Storm	H _{mo} (m)/ T _p (s)		
	Mean	Bias	RMSE
Hurricane Sandy	4.46/13.4	0.08/0.1	0.49/1.1
Hurricane Irene	2.06/11.7	0.06/0.2	0.57/2.4
Nov 2011 extratropical	1.61/10.4	0.04/0.1	0.18/0.9


8


6

Sandy

Irene


Nov 2011

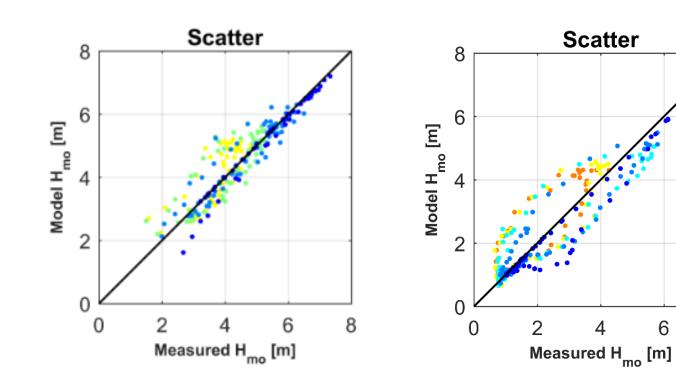

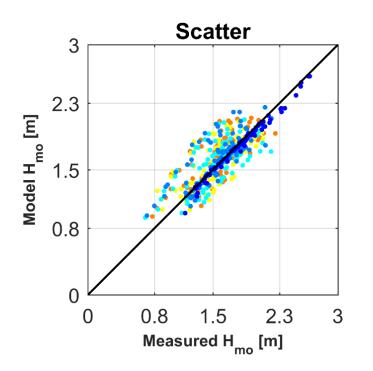



Parallel Efficiency

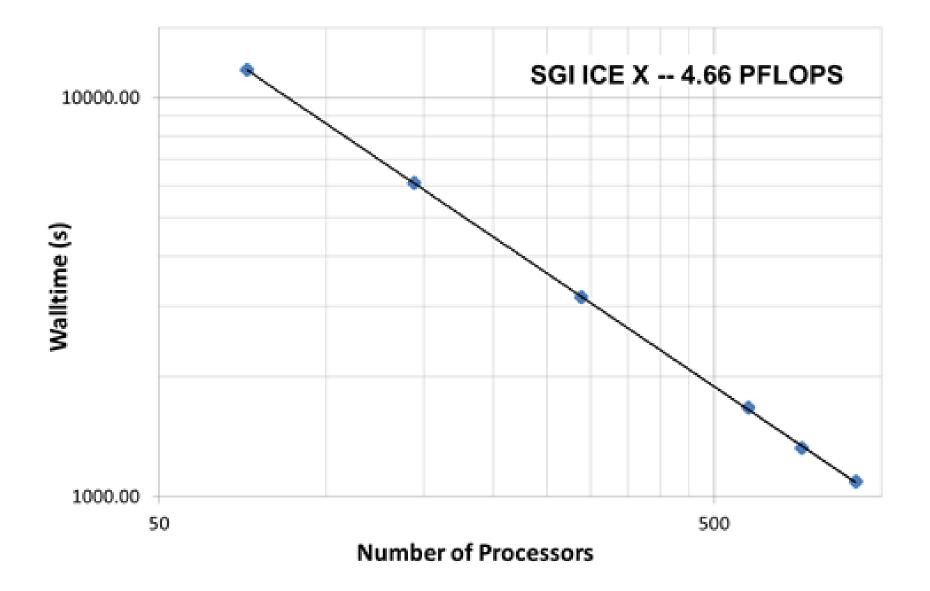





Summary

WAVEWATCH III is a viable option for nearshore application:

- Implicit solver + domain decomposition
- Expand lateral boundary conditions
- Couple with CSTORM (circulation)
- NOAA is coupling w/ ADCIRC for large-scale/high-res hurricane simulations (2-10 million grid nodes)
- Investigate bottom friction and wave breaking
- Run a year-long validation



